



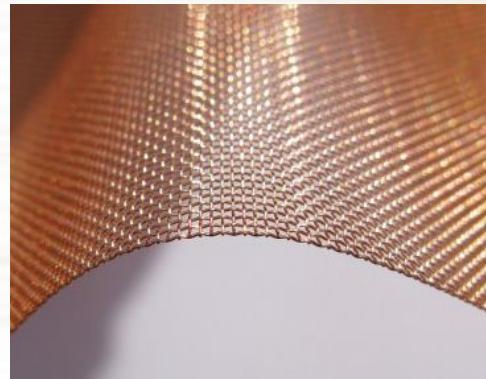

万博丝网

磷铜网

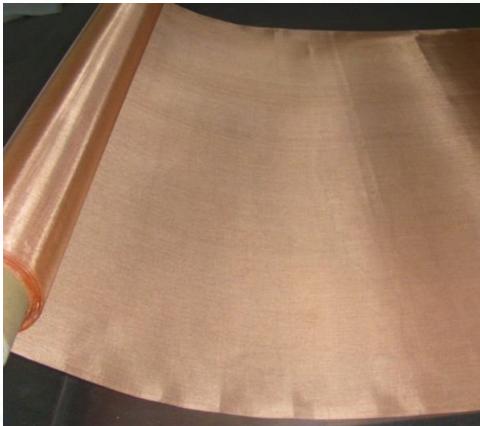


平纹编织

# 磷铜网

## 平纹编织


### 平纹编织

每根经丝交叉地在每根纬丝上下穿过，径丝和纬丝一样粗细，经线和纬线成 90 度角的编织方式。

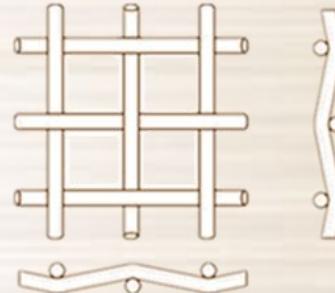

### 孔径 (w)

相邻两个平行丝径之间的距离，不包含丝径的尺寸。

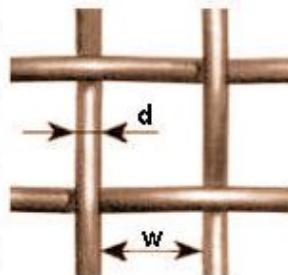

### 目数

指编织网密度的值，每英寸中编织丝网的网孔数

$$\text{目数} = \frac{25.4 \text{ mm}}{w (\text{mm})+d (\text{mm})}$$

### 丝径 (d)

### 开孔率 (A)

开孔率的百分比计算公式：

$$A = \left( \frac{w}{w+d} \right)^2 \times 100\%$$



## 平纹编织

目数	丝径		孔径		开孔率 %	开孔面积 mm <sup>2</sup>	重量	
	mm	inch	mm	inch			kgs/m <sup>2</sup>	lbs/m <sup>2</sup>
6	0.4	0.0157	3.833	0.1509	81.99	14.6944	0.54	1.19
	0.5	0.0196	3.733	0.1469	77.77	13.9377	0.85	1.86
	0.6	0.0236	3.633	0.143	73.66	13.2011	1.22	2.68
8	0.7	0.0275	3.533	0.1391	69.66	12.4844	1.66	3.65
	0.4	0.0157	2.775	0.1092	76.39	7.7006	0.72	1.59
	0.5	0.0196	2.675	0.1053	70.98	7.1556	1.13	2.49
10	0.35	0.0138	2.19	0.086	74.3	4.8	0.69	1.52
	0.4	0.0157	2.140	0.0842	70.98	4.5796	0.90	1.99
	0.5	0.0196	2.040	0.0803	64.50	4.1616	1.41	3.11
12	0.35	0.0138	1.77	0.07	69.66	3.12	0.84	1.83
	0.4	0.0157	1.716	0.0675	65.77	2.9469	1.09	2.39
	0.5	0.0196	1.616	0.0636	58.33	2.6136	1.70	3.72
14	0.3	0.0118	1.514	0.0596	69.66	2.2930	0.71	1.56
	0.35	0.0137	1.464	0.0576	65.13	2.1441	0.96	2.11
	0.4	0.0157	1.414	0.0556	60.76	2.0002	1.27	2.78
16	0.5	0.0196	1.314	0.0517	52.47	1.7273	1.98	4.35
	0.25	0.0098	1.337	0.0526	70.98	1.7889	0.57	1.25
	0.27	0.0106	1.317	0.0518	68.87	1.7358	0.66	1.43
18	0.40	0.0157	1.187	0.0467	55.95	1.4101	1.44	3.18
	0.15	0.0059	1.2611	0.0496	79.87	1.5904	0.23	0.50

# 磷铜网

## 平纹编织

目数	丝径		孔径		开孔率	开孔面积	重量	
	mm	inch	mm	inch			kgs/m <sup>2</sup>	lbs/m <sup>2</sup>
18	0.17	0.0066	1.2411	0.0488	77.35	1.5403	0.29	0.65
	0.19	0.0074	1.2211	0.048	74.88	1.4911	0.37	0.81
	0.21	0.0082	1.2011	0.0472	72.45	1.4426	0.44	0.98
	0.25	0.0098	1.161	0.0457	67.7	1.3481	0.63	1.39
	0.30	0.0118	1.111	0.0437	62	1.2345	0.91	2.01
20	0.4	0.0157	1.0111	0.0398	51.34	1.0223	1.63	3.57
	0.19	0.0074	1.080	0.0425	72.31	1.1664	0.41	0.89
	0.21	0.0082	1.060	0.0417	69.66	1.1236	0.50	1.10
	0.25	0.0098	1.020	0.0401	64.50	1.0404	0.70	1.54
	0.30	0.0118	0.970	0.0381	58.33	0.9409	1.01	2.24
22	0.4	0.0157	0.87	0.0342	46.92	0.7569	1.81	3.98
	0.25	0.0098	0.904	0.0356	61.38	0.8182	0.76	1.68
	0.15	0.0059	0.908	0.0357	73.66	0.825	0.30	0.67
24	0.20	0.0078	0.858	0.0337	65.77	0.7367	0.54	1.19
	0.30	0.0118	0.758	0.0298	51.34	0.5750	1.22	2.68
	0.35	0.0137	0.708	0.0278	44.79	0.5017	1.66	3.65
30	0.12	0.0047	0.726	0.0286	73.66	0.5280	0.24	0.53
	0.13	0.0051	0.716	0.0282	71.64	0.5136	0.28	0.62

目数	丝径		孔径		开孔率 %	开孔面积 mm <sup>2</sup>	重量	
	mm	inch	mm	inch			kgs/m <sup>2</sup>	lbs/m <sup>2</sup>
30	0.15	0.0059	0.696	0.0274	67.7	0.4853	0.38	0.84
	0.17	0.0066	0.676	0.0266	63.87	0.4578	0.48	1.08
	0.19	0.0074	0.656	0.0258	60.15	0.4312	0.61	1.33
	0.20	0.0078	0.646	0.0254	58.33	0.4181	0.68	1.50
	0.27	0.0106	0.576	0.0227	46.39	0.3325	1.23	2.71
40	0.12	0.0047	0.515	0.0202	65.77	0.2652	0.32	0.71
	0.15	0.0059	0.485	0.0190	58.33	0.2352	0.51	1.12
	0.18	0.0070	0.455	0.0179	51.34	0.2070	0.73	1.61
	0.20	0.0078	0.435	0.0171	46.92	0.1892	0.90	1.98
50	0.12	0.0047	0.388	0.0152	58.33	0.1505	0.41	0.89
	0.13	0.0051	0.378	0.0148	55.36	0.1428	0.47	1.04
	0.15	0.0059	0.358	0.0140	49.66	0.1281	0.63	1.39
	0.20	0.0078	0.308	0.0121	36.75	0.0948	1.13	2.49
60	0.10	0.0039	0.323	0.0127	58.30	0.1043	0.33	0.74
	0.11	0.004	0.313	0.0123	54.76	0.09797	0.41	0.90
	0.12	0.0047	0.303	0.0119	51.34	0.0920	0.48	1.08
	0.15	0.0059	0.273	0.0107	41.68	0.0747	0.75	1.66
	0.17	0.0066	0.253	0.0099	35.81	0.0641	0.97	2.14
	0.19	0.0074	0.233	0.0091	30.38	0.0544	1.22	2.68

目数	丝径		孔径		开孔率 %	开孔面积 mm <sup>2</sup>	重量	
	mm	inch	mm	inch			kgs/m <sup>2</sup>	lbs/m <sup>2</sup>
80	0.08	0.032	0.237	0.0093	55.72	0.0561	0.29	0.65
	0.09	0.0035	0.227	0.0089	51.34	0.0517	0.37	0.81
	0.10	0.0039	0.217	0.0085	46.92	0.0473	0.45	0.99
	0.12	0.0047	0.197	0.0077	38.69	0.0390	0.65	1.41
100	0.07	0.0027	0.184	0.0072	52.48	0.0339	0.27	0.61
	0.08	0.0031	0.174	0.0068	46.92	0.0302	0.37	0.80
	0.09123	0.0035	0.164	0.0064	41.69	0.0269	0.46	1.00
	0.10	0.0039	0.154	0.0060	36.75	0.0237	0.57	1.25
120	0.05	0.0020	0.162	0.0064	58.34	0.0261	0.17	0.38
	0.06	0.0024	0.152	0.0060	51.34	0.0230	0.24	0.53
	0.07	0.0028	0.142	0.0056	44.80	0.0201	0.33	0.73
	0.08	0.0031	0.132	0.0052	38.69	0.0173	0.37	0.80
150	0.06	0.0023	0.109	0.0043	41.68	0.0119	0.30	0.67
	0.07	0.0027	0.099	0.0039	34.41	0.0098	0.41	0.90
180	0.05	0.0019	0.091	0.0035	41.68	0.0083	0.25	0.54
	0.06	0.0023	0.081	0.0031	33.03	0.0065	0.36	0.78
200	0.05	0.0019	0.077	0.0030	36.75	0.0059	0.28	0.62
250	0.04	0.0015	0.061	0.0024	36.75	0.0037	0.20	0.44
300	0.04	0.0015	0.044	0.0017	27.83	0.0019	0.24	0.52

**磷铜网**  
**平纹编织**



安平工厂图

**总公司**

**万博丝网有限公司**

河北省安平县丝网工业园东区纬二路 12 号

电话 : 0318-7568801

传真 : 0318-7568802

网址 : [www.webmeshgroup.com](http://www.webmeshgroup.com)

**分公司**

**万博丝网有限公司---石家庄分公司**

河北省石家庄市新华区橙悦城

电话 : 0311-89255081

传真 : 0311-89255081

网址 : [www.webmeshgroup.com](http://www.webmeshgroup.com)